

EF-M LENSES

Discover new shooting perspectives with a range of EF-M lenses for the EOS M6.



EF-M22MM F/2.0 STM | Available Colours ○ ●

This ultra-compact lens uses aspheric lens to produce images of high quality and resolution even at extreme close-ups. The lens also features a stepping motor that enables for silent, seamless Movie Servo AF.



EF-M28MM F/3.5 MACRO IS STM

The world's first* autofocus macro lens with built-in Macro Lite, it is able to illuminate even small objects without shadows. This lens also features a Super Macro mode with 1.2 magnification that instantly produces professional-looking macro photos.

* Among interchangeable autofocus lenses for cameras (SLR and mirrorless cameras). As of May 2016, based on Canon's research.



EF-M11-22MM F/4-5.6 IS STM

This wide-angle zoom lens has the shortest focusing distance in the EOS M lenses at 0.15m, and features an Image Stabilizer producing sharp photos equivalent of a shutter speed that is 3 stops faster.



EF-M15-45MM F/3.5-6.3 IS STM | Available Colours ○ ●

This compact, versatile zoom lens combines both wide-angle and telephoto zoom properties, making it ideal for taking both landscapes and close-up photos.



EF-M18-55MM F/3.5-5.6 IS STM

Ideal for a shallow depth-of-field photos with bokeh effects, this zoom lens also features an Image Stabilizer and Dynamic IS that consistently produces high quality photos and videos.



EF-M18-150MM F/3.5-6.3 IS STM | Available Colours ○ ●

Made for the multidisciplinary photographer, this lens will allow you to cover a large range of shooting scenes from wide angle landscapes to telephoto shots of distant subjects. Plus, with a high zoom ratio of 8.3x you'll get high quality images across the entire focal range.



EF-M55-200MM F/4.5-6.3 IS STM | Available Colours ○ ●

Compact and portable, this lens is the longest telephoto zoom lens in the EF-M lens range, making it particularly ideal for taking photos of distant subjects.

THE EOS M6 IS AVAILABLE IN

EOS M6 (Body)

EOS M6 Kit (EF-M15-45mm F/3.5-6.3 IS STM)

EOS M6 Kit (EF-M18-150mm F/3.5-6.3 IS STM)



MOUNT ADAPTER EF-EOS M

EOS M6 is also compatible with Canon's entire suite of EF, EF-S lenses via the Mount Adapter EF-EOS M

EOS
System
Accessories

EOS M6


Specifications

Imaging Processor	DIGIC 7	
Image Sensor	CMOS Sensor	
Type	CMOS Sensor	
Image Sensor Size	APS-C (22.3 x 14.9mm)	
Effective Pixels	Approx. 24.2 Megapixels	
Lens Mount	EF-M (EF and EF-S lenses compatible via Mount Adapter EF-EOS M)	
LCD Monitor	3.0" ClearView II Touchscreen LCD (TFT) 3:2 aspect ratio, Electrostatic capacitive type	
Type	3.0" ClearView II Touchscreen LCD (TFT) 3:2 aspect ratio, Electrostatic capacitive type	
Effective Pixels	Approx. 1.04 million dots	
Features	Tiltable 180° up and 45° down	
Focus	Dual Pixel CMOS AF with Face + Tracking AF, Smooth Zone AF, 1-point AF	
AF Method	Dual Pixel CMOS AF with Face + Tracking AF, Smooth Zone AF, 1-point AF	
AF Points	Maximum 49 AF points	
Focus Operation	One-Shot AF, Servo AF	
Viewfinder	Optional Electronic Viewfinder: EVF-DC1 (0.48 type), 4:3 aspect ratio, Approx. 2,360,000 dots, 100% coverage Optional Electronic Viewfinder: EVF-DC2 (0.39 type), 4:3 aspect ratio, Approx. 2,360,000 dots, 100% coverage	
Type	Optional Electronic Viewfinder: EVF-DC1 (0.48 type), 4:3 aspect ratio, Approx. 2,360,000 dots, 100% coverage Optional Electronic Viewfinder: EVF-DC2 (0.39 type), 4:3 aspect ratio, Approx. 2,360,000 dots, 100% coverage	
Metering System	Dual Pixel CMOS AF with Face + Tracking AF, Smooth Zone AF, 1-point AF	
ISO Speed	AUTO, ISO 100 - ISO 25600	
Shutter	30-1/4000 sec (1/3 stop increments), Bulb (Total shutter speed range. Available range varies by shooting mode)	
Shutter Speed	30-1/4000 sec (1/3 stop increments), Bulb (Total shutter speed range. Available range varies by shooting mode)	
Flash	Yes	
Built-in Flash	Yes	
Modes	Auto (E-TTL II), Manual Flash On/Off (3 flash power output settings)	
External Flash	E-TTL II with EX series Speedlites, wireless multi-flash support	
Shooting Specifications	9.0 fps (AF fixed) 7.0 fps (AF tracking)	
Continuous Shooting (Approx.)	9.0 fps (AF fixed) 7.0 fps (AF tracking)	
Still Images: 3:2	L (Large):	Approx. 24.0 megapixels (6000 x 4000)
	M (Medium):	Approx. 10.60 megapixels (3984 x 2656)
	S1 (Small 1):	Approx. 5.90 megapixels (2976 x 1984)
	S2 (Small 2):	Approx. 3.80 megapixels (2400 x 1600)
	RAW:	Approx. 24.0 megapixels (6000 x 4000)
Still Images: Aspect Ratios	3:2, 4:3, 16:9, 1:1	
Movie	1920 x 1080 (Full HD) 60p / 50p / 30p / 25p / 24p	
Movie Resolution	1280 x 720 (HD)	60p / 50p
	640 x 480 (SD)	30p / 25p
	Dimensions	112.0(Width) x 68.0(Height) x 44.5 mm(Depth)
Weight (CIPA compliant testing standard, including battery and memory card)	Approx. 390g	
Network	Wi-Fi / NFC / Bluetooth®	
Optional Accessories	Body Jacket EH30-CJ Neck Strap EM-E2	

EOS M6

Canon

Delighting You Always

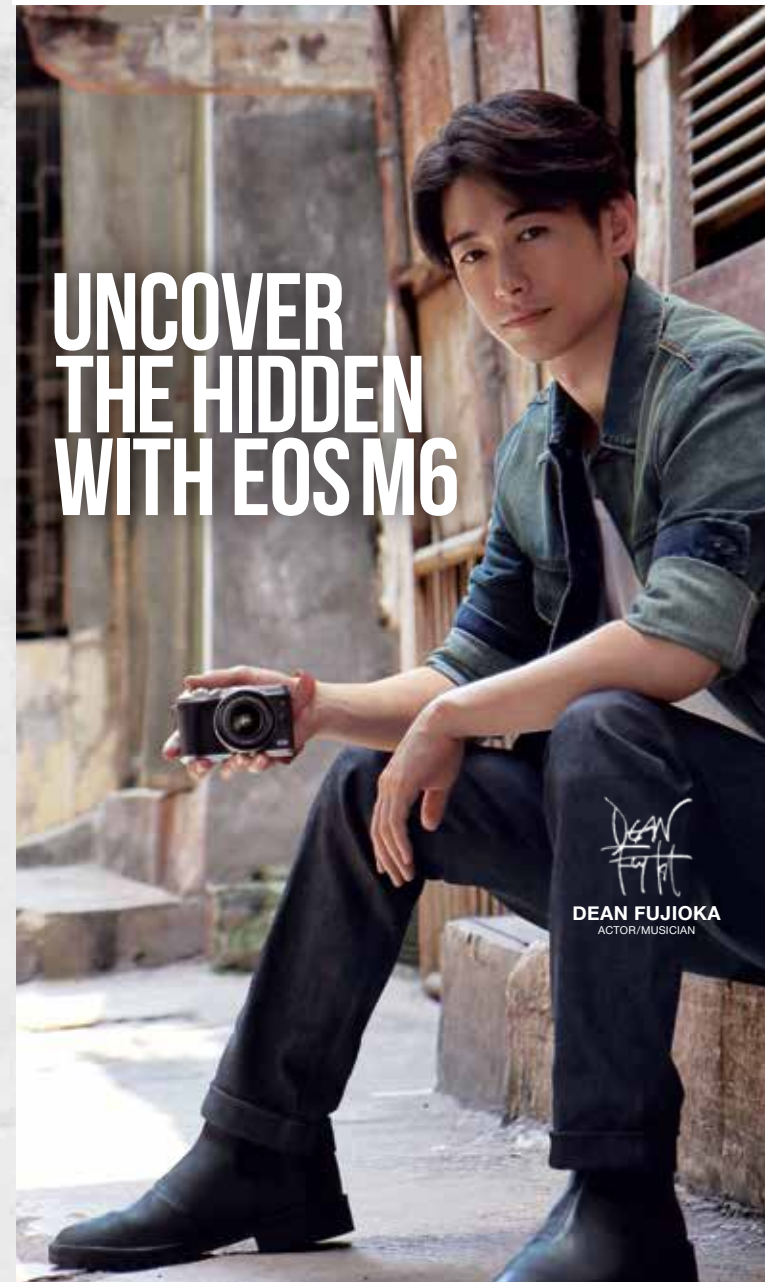

UNCOVER
THE HIDDEN
WITH EOS M6

DEAN FUJIOKA
ACTOR/MUSICIAN



CANON IMAGING ASIA



CANON ASIA



@CANONASIA

SNAPSHOT

SNAPSHOT.CANON-ASIA.COM

South and Southeast Asia Regional Headquarters: Canon Singapore Pte Ltd
1 Fusionopolis Place #15-10 Galaxia Singapore 138522 | www.canon-asia.com

Insist on an original warranty by your sales office. Specifications are subject to change without notice. Images are simulated.

0206W957

Dual Pixel
CMOS AF

DIGIC
7

24.2 MEGA
PIXELS
CMOS

FULL HD
60p
Recording

9
Frames
per sec

180° up/down
45°
LCD

Wi-Fi / NFC

Bluetooth

Multi
LIPAN

DISCOVER THE FEATURES OF EOS M6

Go beyond your limits with the EOS M6 and its superior video and photo quality. Packed with unique features, the EOS M6 mirrorless camera will inspire you to discover true beauty. No matter where you are, there's always more to uncover.



HIGH IMAGE QUALITY



The EOS M6, powered by the DIGIC 7 image processor and an impressive 24.2 Megapixel APS-C CMOS sensor captures stunning DSLR-like quality pictures with high image clarity and reduced noise levels.



DUAL PIXEL CMOS AF PROVIDES HIGH COVERAGE DENSITY
APPROXIMATELY 80% (VERTICAL) X 80% (HORIZONTAL) OF THE SENSOR.

HIGH PERFORMANCE SHOOTING (DUAL PIXEL CMOS AF)



Canon's Dual Pixel CMOS AF technology delivers highly precise AF in a variety of scenes, whether for stills or video. With 24.2 million phase-difference sensors in place, phase-difference AF is possible over 80% x 80% area of the focal plane's entire surface, users will have more flexibility in framing creative compositions.

With fixed AF, you can achieve high-speed continuous shooting performance of up to approximately 9 fps, allowing you to uncover a world of shooting possibilities.



MOVIE SHOOTING



Get even more creative control with the EOS M6. The touch AF lets you capture professional-looking and mesmerizing movies with beautiful 'background blur' and low noise. The Dual Pixel CMOS AF together with a range of STM lenses enables seamless focusing that caters to any creative style. And with the Combination IS and combined supported IS lenses you get enhanced image stabilization while on-the-go.

For even more creative opportunities, choose from 3 selectable shooting intervals to shoot your favourite time-lapse videos.



EH30-CJ Body Jacket (Brown) EH30-CJ Body Jacket (Black) EM-E2 Neck Strap (Brown) EM-E2 Neck Strap (Black) Electronic Viewfinder EVF-DC2

DESIGN

Customize the EOS M6 with your personal touch by accessorizing it with a premium leather strap and camera jacket. The optional electronic viewfinder EVF-DC2 houses an Organic EL display with enhanced colour reproduction capabilities and sharper contrast, allowing you to achieve your desired colour exposure under harsh lighting conditions.



UNLEASH YOUR CREATIVITY

Push your creativity beyond your expectations with the EOS M6. Snap the perfect selfies with Self-Portrait mode that optimizes settings such as skin smoothing and brightness adjustments. Can't find the right tone to your image? Creative Assist mode makes it easy to adjust photo colours all in real-time.

WIFI/NFC/BLUETOOTH®



The EOS M6 makes transferring images and videos to smart devices quick and easy via the Camera Connect app. You can even upload them on the go, directly onto social media platforms via Canon Image Gateway.

The Bluetooth low energy technology lets you stay connected to your smart devices even when the camera is in Auto Power Off mode.