

High performance office communication platform

The imageRUNNER ADVANCE C5500i Series delivers high performance and quality colour output for demanding office environments. These intelligent multifunctionals enhance productivity through improved document workflows and intuitive user experience. With added security features, the imageRUNNER ADVANCE C5500i is an essential device for any modern day working environment.

Workflow Efficiency

- Intuitive user interface with a large, colour touchscreen provides users with smartphone-like usability, making navigation a breeze.
- Intelligent feeder allows effortless, rapid scanning with features like multi-sheet feed detection and skip blank originals.
- My ADVANCE enables a unique, personal experience tailored to meet each user's workflow needs. Settings, such as display language, initial log-in screen, and accessibility options, can be synchronised across multiple devices for consistency.
- Canon's MEAP platform provides process optimisation, by integrating with a range of powerful document, capture and output management solutions.
- Scalable support for mobile where users can connect directly to the device with Direct Access Point. Capture, scan or print documents easily with the Canon Print Business app.
- Scan and convert documents through a single-pass duplexing document feeder that holds up to 150 originals.
- Intelligent Recovery wakes device from sleep mode when user is approaching device via motion sensor technology.
- Various finishing functions such as Staple-on-Demand, ECO-Staple, saddle stitch, double/corner stapling and foldings are available as an option.

Cost Management

- The ability to apply print policies, monitor output, and restrict usage by user helps reduce unnecessary printing, encourages cost recovery, and can help save money on paper and toner.
- Tight integration with output management solutions, such as uniFLOW, provides the ability to carry out detailed tracking, reporting, and cost analysis.
- Quality and reliability, combined with remote diagnostics and assistance, can help reduce costs by minimising downtime and time spent by IT resolving issues.
- Consistent user operation combined with remote and centralised fleet management can help simplify IT management of devices and entire fleets.



Security

- Control who has access to the device with Picture Login authentication.
- Prevent unauthorised distribution of sensitive information with an array of standard and optional document security features.
- Ensure information privacy and security across your network with IPsec, port filtering capabilities, and SSL technology.
- Enhance document confidentiality with encrypted secure print, secure print, secure watermark, encrypted PDF and device signature PDF.



Device and Fleet Management Efficiency

- Synchronise personalised user settings across multiple devices through My ADVANCE Sync.
- Canon's device management tools give you a centralised point of control across your entire fleet, upgrade devices remotely, check device and consumables status and capture meter readings.
- Remote diagnostics allow timely, accurate and effective resolution.
- Standard PCL and optional Adobe® PostScript® 3™ print driver allows seamless integration with enterprise applications.
- Intuitive user maintenance videos and status notifications available to help achieve maximum uptime and keep supplies replenished.


Reliability

- V² (Vivid & Vibrant) imaging technology ensures high quality printouts that impress time after time.
- Supreme transferability of toner and stable reproduction of colours onto a wide range of media, even at large volumes.
- State-of-the-art imaging technologies and toner allow for consistently striking images with real 1,200 dpi. print resolution.
- Maximum paper capacity of 6,350 sheets reduces downtime.

Sustainability

- Fusing technologies, CS toner, and innovative sleep mode features help lower overall energy consumption.
- Minimise paper wastage by holding jobs at the device with Force Hold Print. Choose to preview your print jobs or even change print settings at the device to achieve the desired results at the first time of printing.
- Incorporates sustainable design, with the use of recycled materials and bio-based plastic, and a focus on minimising environmental impact.
- Consumes as little as 0.8W in sleep mode.

Configuration

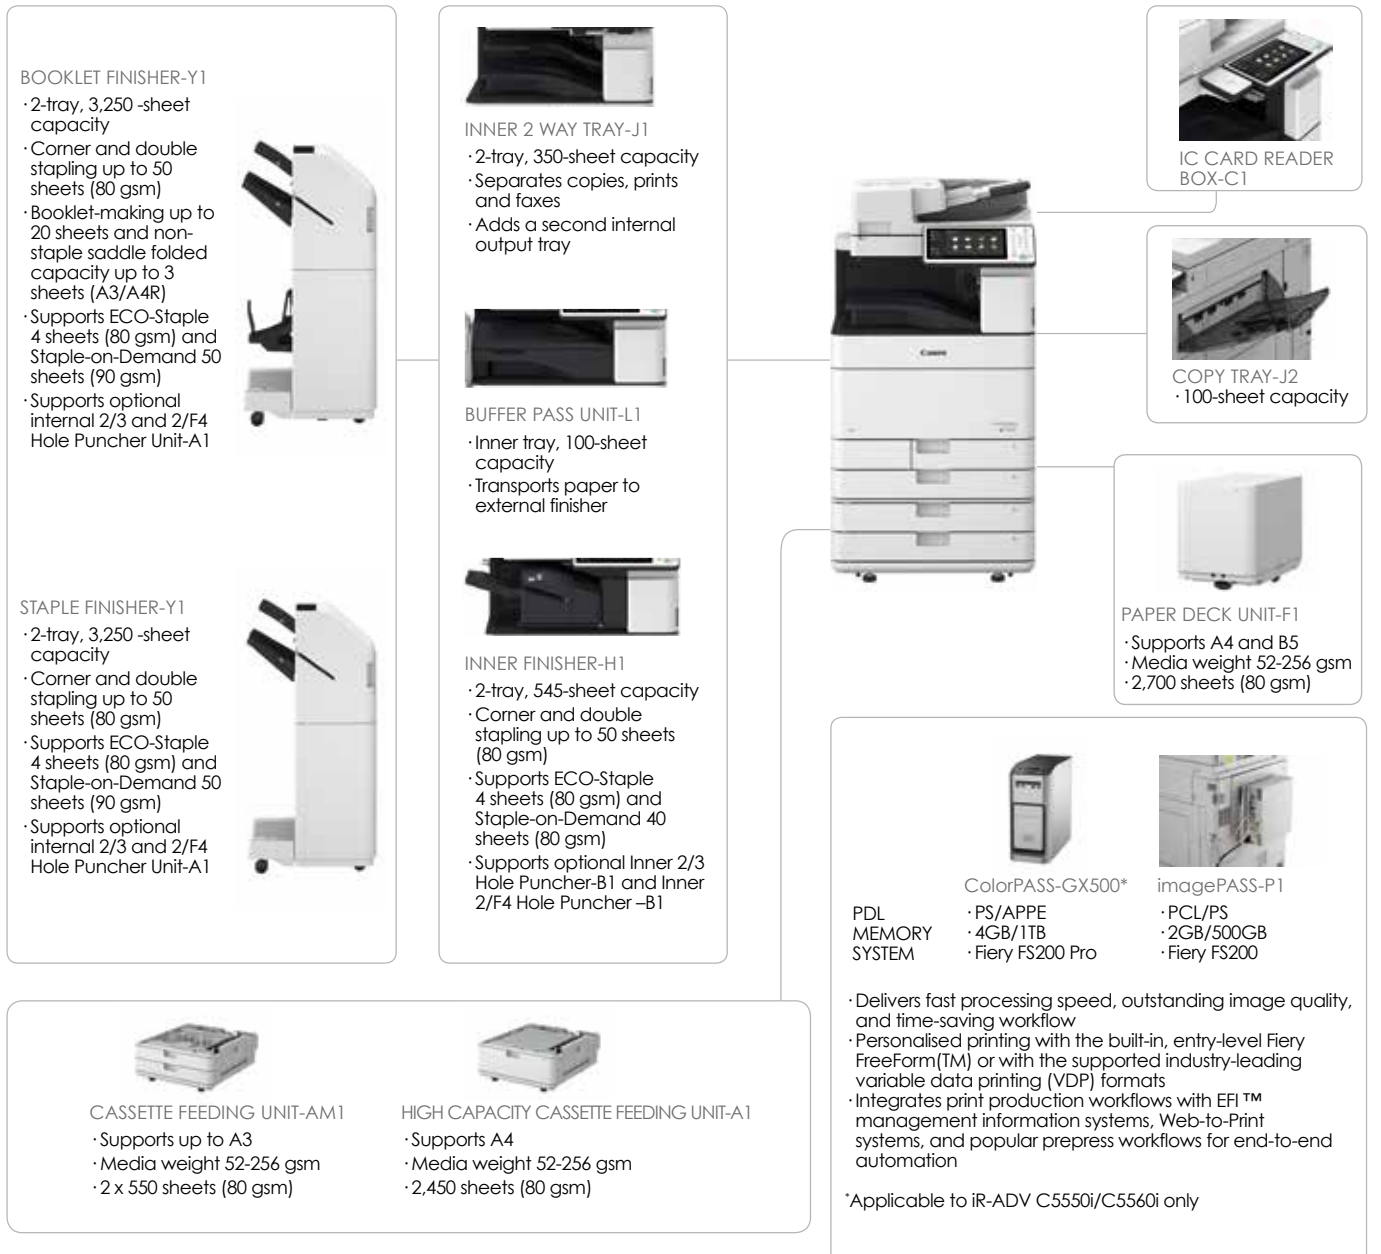

Main Unit

Type
Colour Laser Multifunctional

Core Function
Print, Copy, Scan, Send, Store and Optional Fax

Processor
Canon Dual Custom Processor (Shared)

Control Panel
10.1 inch TFT LCD WSVGA Colour Touchpanel

Memory
Standard: 4.0GB RAM

Hard Disk Drive
Standard: 250GB
Maximum: 1TB

Mirroring Hard Disk Drive
Optional 250GB, 1TB

Interface Connection
Network Standard : 1000Base-T/100Base-TX/10Base-T,
Wireless LAN (IEEE 802.11 b/g/n)
Optional : NFC, Bluetooth
Others Standard : USB 2.0 x2 (Host), USB 3.0 x1 (Host),
USB 2.0 x1 (Device)
Optional : Serial Interface, Copy Control Interface

Paper Capacity (80gsm, A4)
Standard: 1,200 Sheets
Maximum: 6,350 Sheets

Paper Sources (80gsm, A4)
Standard: Two 550-sheet Paper Cassettes
100-sheet Multi-purpose tray
CASSETTE FEEDING UNIT-AM1:
Two 550-sheet Paper Cassettes
HIGH CAPACITY CASSETTE FEEDING UNIT-A1:
2,450-sheet Paper deck
PAPER DECK UNIT-F1:
2,700-sheet Paper deck
Maximum: 6,350 Sheets

Paper Output Capacity (80gsm, A4)
Standard: 250 Sheets
Maximum: 3,450 Sheets (with External Finisher and Copy Tray)

Finishing Capabilities
Standard : Collate, Group
With Inner : Collate, Group, Offset, Staple, *Hole Punch,
Finisher ECO-Staple, Staple-on-Demand
*Requires for INNER 2/3 HOLE PUNCHER-B1 or INNER 2/F4 HOLE PUNCHER-B1
With External: Collate, Group, Offset, Staple, **Booklet,
Finisher *Hole Punch, ECO-Staple, Staple-on-Demand
*Requires for 2/3 HOLE PUNCHER UNIT-A1 or 2/F4 HOLE PUNCHER UNIT-A1
**BOOKLET FINISHER-Y1 only

Supported Media Types
Cassette 1: Thin paper, Plain paper, Thick paper, Colour paper,
Recycled paper, Pre-punched paper, Transparency*,
Bond paper, Envelope, Letterhead
Cassette 2: Thin paper, Plain paper, Thick paper, Colour paper,
Recycled paper, Pre-punched paper, Transparency*,
Tab paper**, Bond paper, Envelope, Letterhead
CASSETTE FEEDING UNIT-AM1:
Thin paper, Plain paper, Thick paper, Colour paper,
Recycled paper, Pre-punched paper, Transparency*,
Bond paper, Letterhead
HIGH CAPACITY CASSETTE FEEDING UNIT-A1:
Thin paper, Plain paper, Thick paper, Colour paper,
Recycled paper, Pre-punched paper, Bond paper,
Letterhead
Multi-purpose tray:
Thin paper, Plain paper, Thick paper, Colour paper,
Recycled paper, Pre-punched paper, Transparency*,
Tracing paper, Label, Tab paper, Bond paper,
Coated paper, Envelope, Letterhead, Labels
PAPER DECK UNIT-F1:
Thin paper, Plain paper, Thick paper, Colour paper,
Recycled paper, Pre-punched paper, Bond paper,
Letterhead

*Use only A4 transparencies made especially for multi-functional device
**Requires TAB FEEDING ATTACHMENT F1

Supported Media Sizes
Cassette 1: Standard size: A4, B5, A5, A5R
Custom Size: 98.0 mm x 148 mm to
297 mm x 215.9 mm
Cassette 2: Standard size: A3, B4, A4, A4R, B5, B5R, A5R,
Foolscap, India Legal, F4A
Custom size: 98.0 mm x 182 mm to
304.8 mm x 457.2 mm
CASSETTE FEEDING UNIT-AM1:
Standard size: A3, B4, A4, A4R, B5, B5R, A5R,
Foolscap, India Legal, F4A
Custom size: 98.0 mm x 182 mm to
304.8 mm x 457.2 mm
HIGH CAPACITY CASSETTE FEEDING UNIT-A1:
Standard size: A4
PAPER DECK UNIT-F1: A4, B5
Multi-purpose tray:
Standard size: A3, B4, A4, A4R, B5, B5R, A5, A5R,
Foolscap, India Legal, F4A, Envelope
(No.10(COM10), Monarch, DL, ISO-C5)
Custom Size : 98.0 mm x 139.7 mm to
320 mm x 457.2 mm
Free Size: 98.0 mm x 139.7 mm to
320 mm x 457.2 mm

Supported Media Weights
Cassettes : 52 to 256 gsm
Multi-purpose tray : 52 to 300 gsm
Duplex : 52 to 220 gsm

Warm-up Time
*From Power On : 30 Seconds or Less
*Time between device power-on and when the start key is
enabled (print reservation)
From Deep Sleep Mode:10 Seconds or Less

** Quick Startup Mode: 4 seconds
** If <Quick Startup Settings for Main Power> is set to "On", it takes
4 seconds until the key operation on the touch panel display
is available after turning on the main power of the machine.
Depending on the situations, the machine does
not startup quickly.

Dimensions (W x D x H) 620 mm x 742 mm x 950 mm

Installation Space (W x D) 980 mm x 1,176 mm
(When Multi-purpose tray Extended + Cassette Drawers open)

Weight* Approx. 142kg
*Including the toner bottle

Print Specifications

Printing Method
Colour laser beam printing

Print Speed	iR-ADV C5560i	60 ppm (A4)
		32 ppm (A3)
	iR-ADV C5550i	50 ppm (A4)
		27 ppm (A3)
	iR-ADV C5540i	40 ppm (A4)
		22 ppm (A3)
	iR-ADV C5535i	35 ppm (A4)
		18 ppm (A3)

Print Resolution
600 dpi x 600 dpi (Default), 1,200 dpi x 1,200 dpi

Page Description Languages
UFR II, PCL6 (Standard), Adobe PS 3 (Option)

Double Sided Printing
Automatic (Standard)

Direct Print
Direct printing available from USB memory key, Advanced
box, Remote UI and Web Access*
Supported File Types: PDF, TIFF, JPEG, XPS
*Only PDF print from websites is supported.

Fonts
PCL fonts: 93 Roman, 10 Bitmap fonts, 2 OCR fonts,
Andale Mono WT, J/K/S/T* (Japanese, Korean,
Simplified and Traditional Chinese), Barcode fonts**
**Requires optional PCL INTERNATIONAL FONT SET-A1
**Requires optional BARCODE PRINTING KIT-D1
PS fonts: 136 Roman

Operating System
UFR II: Windows Vista/Server 2008/Windows 7/Server 2008 R2/
Server 2012/Windows 8.1/Server 2012 R2/Windows 10/
Server 2016, MAC OS X (10.7 or later)
PCL: Windows Vista/Server 2008/Windows 7/Server 2008 R2/
Server 2012/Windows 8.1/Server 2012 R2/Windows 10/
Server 2016
PS: Windows Vista/Server 2008/Windows 7/Server 2008 R2/
Server 2012/Windows 8.1/Server 2012 R2/Windows 10/
Server 2016, MAC OS X (10.7 or later)
PPD: MAC OS X (10.3.9 or later), Windows Vista/Windows 7/
Windows8.1/Windows10

Copy Specifications

Copy Speed	iR-ADV C5560i:	60 ppm (A4)
		32 ppm (A3)
	iR-ADV C5550i:	50 ppm (A4)
		27 ppm (A3)
	iR-ADV C5540i:	40 ppm (A4)
		22 ppm (A3)
	iR-ADV C5535i:	35 ppm (A4)
		18 ppm (A3)

*First-Copy-Out Time (A4)
* 20 °C to 30 °C Environment

iR-ADV C5560i: Approx. 2.9 seconds or less (BW),
Approx. 4.5 seconds or less (CL)
iR-ADV C5550i: Approx. 3.5 seconds or less (BW),
Approx. 5.2 seconds or less (CL)
iR-ADV C5540i: Approx. 4.1 seconds or less (BW),
Approx. 6.1 seconds or less (CL)
iR-ADV C5535i: Approx. 4.9 seconds or less (BW),
Approx. 7.4 seconds or less (CL)

Copy Resolution
Reading: 600 dpi x 600 dpi
Printing: Up to 1,200 dpi x 1,200 dpi

Multiple Copies
Up to 999 copies

Copy Exposure
Automatic or Manual (9 Levels)

Magnification
25% - 400% (1% Increments)

Presets Reductions
25%, 50%, 61%, 70%, 81%, 86%

Presets Enlargements
115%, 122%, 141%, 200%, 400%

Scan Specifications

Type
Single-pass Duplexing Automatic Document Feeder

Document Feeder Paper Capacity
150 Sheets (80gsm)

Document Feeder Supported Media Sizes
A3, A4, A4R, A5, A5R, B4, B5, B5R, B6R

Document Feeder Supported Media Weights	
Single-sided scanning:	38* to 157 gsm (BW)
	64 to 157 gsm (CL)
Double-sided scanning:	50 to 157 gsm (BW)
	64 to 157 gsm (CL)

*Originals weighing from 38 g/m2 to 42 g/m2 are supported when scanning
a single original that has a width of 257 mm or larger.

Pull Scan Spec
Color Network ScanGear2. For both Twain and WIA
Supported OS: Windows Vista/7/8.1/10 Windows Server
2008/Server 2008 R2/Server 2012/
Server 2012 R2/Server 2016

Scan Resolution
100 x 100 dpi, 150 x 150 dpi, 200 x 100 dpi, 200 x 200 dpi,
200 x 400 dpi, 300 x 300 dpi, 400 x 400 dpi, 600 x 600 dpi

Platen Acceptable Originals
Platen: Sheet, Book, 3-Dimensional Objects
[Up to 2kg]
Feeder size: A3, A4, A4R, A5, A5R, B4, B5, B5R, B6

Scan Speed (A4)
Single-sided Scanning (BW) : 80 ipm (300dpi)/80 ipm (600 dpi)
Single-sided Scanning (Colour) : 80 ipm (300dpi)/60 ipm (600 dpi)
Double-sided Scanning (BW) : 160 ipm (300dpi)/150 ipm (600 dpi)
Double-sided Scanning (Colour) : 160 ipm (300dpi)/80 ipm (600 dpi)

Double sided scanning
2-sided to 2-sided (Automatic)

Send Specifications

Optional/ standard
Standard on all models

Destination
E-mail/Internet FAX (SMTP), SMB, FTP, WebDAV, Mail Box,
Super G3 FAX(Optional), IP Fax(Optional)

Colour Mode
Automatic-Colour Select (Full Colour/Grayscale),
Automatic-Colour Select(Full Colour/Black-and-White),
Full colour, Grayscale, and Black-and-White

Address Book
LDAP (2,000)/Local (1,600)/One-touch (200)

Send Resolution
100 x 100 dpi, 150 x 150 dpi, 200 x 100 dpi, 200 x 200 dpi,
200 x 400 dpi, 300 x 300 dpi, 400 x 400 dpi, 600 x 600 dpi

Communication Protocol
File: FTP, SMB v3.0, WebDAV
E-mail/IFax: SMTP, POP3, I-Fax (Simple, Full)

File Format
Standard: TIFF, JPEG, PDF(Compact, Apply policy, Optimize
for Web, PDF A/1-b, Encrypted), XPS(Compact),
PDF/XPS(Digital Signature)

Optional: PDF(Trace&Smooth, Searchable), XPS
(Searchable), Office Open XML
(PowerPoint, Word)

Fax Specifications

Optional/ Standard Optional on all models
Maximum Number of Connection Lines 4

Modem Speed
Super G3: 33.6 kbps
G3: 14.4 kbps

Compression Method
MH, MR, MMR, JBIG

Resolution
400 x 400 dpi, 200 x 400 dpi,
200 x 200 dpi, 200 x 100 dpi

Sending/Recording Size
A5 and A5R* to A3
*Sent as A4

FAX Memory Up to 30,000 pages
Speed Dials Max. 200
Group Dials/Destinations Max. 199 dials
Sequential Broadcast Max. 256 addresses
Memory Backup Yes

Store Specifications

Mail Box (Number supported)
100 User Inboxes, 1 Memory RX Inbox,
50 Confidential Fax Inboxes
30,000 Maximum Pages Stored

Advanced Box
Communication Protocol: SMB or WebDAV
Supported Client FC: Windows (Windows Vista/7/8/8.1/10)
Concurrent Connections (Max.): SMB: 64, WebDAV: 3 (Active Sessions)

Advanced Box Available Disc Space
Approx. 16GB (Standard HDD)
Approx. 480GB (1TB HDD)

Memory Media
Standard: USB Memory

Security Specifications

Authentication
Standard: Picture Login Authentication, User Authentication,
Department ID Authentication, (Device and Function
Level Login), Access Management System
Optional: My Print Anywhere secure print (Requires uniFLOW)

Data
Standard: Trusted Platform Module (TPM), Hard Disk Password Lock,
Hard Disk Drive Erase, Hard Disk Drive Encryption (FIPS140-2
Validated), Mail Box Password Protection
Optional: Hard Disk Drive Mirroring, Hard Disk Drive removal

Network
Standard: IP/Mac Address Filtering, IPSEC, TLS Encrypted
Communication, SNMP V3.0, IEEE 802.1X, IPv6, SMTP
Authentication, POP Authentication before SMTP

Document
Standard: Secure Print, Encrypted PDF, Encrypted Secure
Print, Device signature, Secure Watermarks
Optional: User signature, Document Scan locking

Environmental Specifications

Operating Environment
Temperature: 10 to 30 °C (50 to 86 °F)
Humidity: 20 to 80 % RH (no condensation)

Power Requirements
220-240V (±10 %), 50/60Hz (±2 Hz), 6Amp

Power Consumption
 Maximum: 1.8 kW
 Standby: Approx. 67.9 W*
*Reference Value
 Sleep mode: Approx. 0.8 W**
**0.8W sleep mode is not available in all circumstances due to certain settings.

Consumables

Toner Yield (Estimated Yield @5% Coverage)
 NPG-71 Toner BK : 69,000 Pages
 NPG-71 Toner C/M/Y : 60,000 Pages

Software and Printer Management

Remote management tools
 eMaintenance: Compatible with eMaintenance services via embedded RDS (Enables meter capture, automatic consumables management, remote diagnostics and reporting for service providers to offer efficient, fast and proactive maintenance)

Content Delivery System: Allows the Remote distribution of firmware, iR options and MEAP applications; Remote User Interface (RUI) Web-based interface to each device that helps to provide remote device management and control.

iW Management Console: Server-based software for centralised management of a fleet of devices (includes monitoring or consumables, status monitoring and alerts, distribution of address books, configuration settings, firmware and MEAP applications, meter capture and reporting, driver and resource management)

Scanning software
 Network ScanGear: TWAIN-compliant scanner driver that enables computers on a network to use the pull scan functionality of the device.

Platform
 MEAP (Multifunction Embedded Application Platform): A powerful JAVA Embedded Platform for Canon devices which provides tight coupling between a range of software solutions and the device.

Document Publishing
 iW DESKTOP: Powerful print publishing software which easily combines documents from different sources and file formats, applies finishing with preview and templates to create professional looking documents. Includes PDF creation, annotation and compression capabilities for simple digital workflows such as proofing and authorization.

Paper Supply Options

PAPER SUPPLYING UNIT
 Name: CASSETTE FEEDING UNIT-AM1
 Paper Capacity: 550 Sheets x 2 Cassettes (80 gsm)
 Paper Size: Standard size: A3, B4, A4, A4R, B5, B5R, A5R, Foolscap, India Legal, F4A
 Custom size: 98.0 mm x 182 mm to 304.8 mm x 457.2 mm

Paper Weight: 52 to 256 gsm
 Power Source/Max. Power Consumption: From the Main Unit
 **Dimensions (W x D x H): 620 mm x 700 mm x 251 mm
 ***When attached with the Main Unit
 Weight: Approx. 22.5 kg

Name: HIGH CAPACITY CASSETTE FEEDING UNIT-A1
 Paper Capacity: 2,450 sheets (80 gsm)
 Paper Size: A4
 Paper Weight: 52 to 256 gsm
 Power Source/Max. Power Consumption: From the Main Unit
 **Dimensions (W x D x H): 620 mm x 700 mm x 251 mm
 ***When attached with the Main Unit
 Weight: Approx. 30 kg

Name: PAPER DECK UNIT-F1
 Paper Capacity: 2,700 sheets (80 gsm)
 Paper Size: A4, B5
 Paper Weight: 52 to 256 gsm
 Power Source/Max. Power Consumption: From the Main Unit
 Dimensions (W x D x H): 344 mm x 630 mm x 440 mm
 Weight: Approx. 31 kg

Output options

INNER FINISHER
 Name: INNER FINISHER-H1
 Number of Trays: 2
 Top Tray Capacity: A4/B5/A5/A5R 45 sheets
 A3/B4/A4R/B5R 45 sheets
 Lower Tray Capacity: A4/B5/A5/A5R 500 sheets
 A3/B4/A4R/B5R 250 sheets
 Paper Weight: 52 to 300 gsm
 Staple Position: Corner, Double
 Staple Capacity: Corner and Double
 Stapling: A4/B5: 50 sheets (52 to 90 gsm)
 A3/B4/A4R: 30 sheets (52 to 90 gsm)
 A3/A4/B4/B5: 5 sheets (52 to 64 gsm)
 4 sheets (65 to 81.4 gsm)
 3 sheets (81.5 to 105 gsm)
 ECO-Staple: 3 sheets (81.5 to 105 gsm)
 Staple-on-Demand: 40 sheets (80 gsm)
 Power Source/Max. Power Consumption: From the Main Unit
 Dimensions (WxDxH): 466 mm x 525 mm x 225 mm
 Weight: Approx. 8.6 kg

STAPLE FINISHER
 Name: STAPLE FINISHER-Y1 (External)
 Number of Trays: 2
 Top Tray Capacity: A4/B5/A5/A5R 250 sheets
 A3/B4/A4R/B5R 125 sheets
 Lower Tray Capacity: A4/B5/A5/A5R 3,000 sheets
 A3/B4/A4R/B5R 1,500 sheets
 Paper Weight: Upper Tray 52 to 256 gsm
 Lower Tray 52 to 300 gsm
 Staple Position: Corner, Double
 Staple Capacity: Corner and Double
 Stapling: A4/B5: 50 sheets (52 to 90 gsm)
 A3/B4/A4R: 30 sheets (52 to 90 gsm)
 ECO-Staple: A3/A4: 5 sheets (52 to 64 gsm)
 4 sheets (65 to 81.4 gsm)
 3 sheets (81.5 to 105 gsm)
 Staple-on-Demand: 50 sheets (90 gsm)
 *Dimensions (W x D x H): 637 mm x 623 mm x 1,142 mm
 **When the extension tray is extended
 Weight: Approx. 31 kg

BOOKLET FINISHER
 Name: BOOKLET FINISHER-Y1 (External)
 Number of Trays: 2
 Top Tray Capacity: A4/B5/A5/A5R 250 sheets
 A3/B4/A4R/B5R 125 sheets
 Lower Tray Capacity: A4/B5/A5/A5R 3,000 sheets
 A3/B4/A4R/B5R 1,500 sheets
 Paper Weight: Upper Tray 52 to 256 gsm
 Lower Tray 52 to 300 gsm
 Staple Position: Corner, Double
 Staple Capacity: Corner and Double
 Stapling: A4/B5: 50 sheets (52 to 90 gsm)
 A3/B4/A4R: 30 sheets (52 to 90 gsm)
 ECO-Staple: A3/A4: 5 sheets (52 to 64 gsm)
 4 sheets (65 to 81.4 gsm)
 3 sheets (81.5 to 105 gsm)
 Staple-on-Demand: 50 sheets (90 gsm)
 Booklet Stitch paper size: A3/B4/A4R, Custom Size (195 mm x 270 mm to 304.8 mm x 457.2 mm)
 Booklet Stitch Staple Capacity: 20 sheets x 10 sets (52-81.4gsm)
 *Dimensions (WxDxH): 637 mm x 623 mm x 1,142 mm
 **When the extension tray is extended
 Weight: Approx. 57 kg

PUNCHER UNIT/S
 INNER 2/3 HOLE PUNCHER-B1: Two or Three Holes
 *Requires INNER FINISHER-H1
 Acceptable Punch Paper Weight: 52 to 300 gsm
 Acceptable Punch Paper Size: Two holes A3, B4, A4, A4R, B5, B5R
 Three holes A3, B4, A4, B5
 Power Source: From the Main Unit
 INNER 2/F4 HOLE PUNCHER-B1: Two or Four Holes
 *Requires INNER FINISHER-H1
 Acceptable Punch Paper Weight: 52 to 300 gsm
 Acceptable Punch Paper Size: Two holes A3, B4, A4, A4R, B5, B5R
 Four holes A3, A4
 Power Source: From the Main Unit

2/3 HOLE PUNCHER-A1: Two or Three Holes
 *Requires either the STAPLE FINISHER-Y1 or BOOKLET FINISHER-Y1
 Acceptable Punch Paper Weight: 52 to 300 gsm
 Acceptable Punch Paper Size: Two holes A3, B4, A4, A4R, B5, B5R
 Three holes A3, B4, A4, B5
 Power Source: From the Main Unit
 2/F4 HOLE PUNCHER-A1: Two or Four Holes
 *Requires either the STAPLE FINISHER-Y1 or BOOKLET FINISHER-Y1
 Acceptable Punch Paper Weight: 52 to 300 gsm
 Acceptable Punch Paper Size: Two holes A3, B4, A4, A4R, B5, B5R
 Four holes A3, A4
 Power Source: From the Main Unit

Hardware Accessories

Card Readers
 MICARD PLUS PROXIMITY CARD READER
 COPY CARD READER-F1
 COPY CARD READER ATTACHMENT-B5

Others
 TAB FEEDING ATTACHMENT KIT-F1
 UTILITY TRAY-B1
 INNER 2WAY TRAY-J1

Security Options

Document Security
 DOCUMENT SCAN LOCK KIT-B1

Data Security
 HDD MIRRORING KIT-J1
 2.5INCH/250GB HDD-N1
 2.5INCH/1TB HDD-P1
 REMOVABLE HDD KIT-AL1

System and Controller options

Print Accessories
 PCL INTERNATIONAL FONT SET-A1
 PCL ASIAN FONT SET-A1

Barcode Printing
 BARCODE PRINTING KIT-D1

EFI-Fiery Based Controller
 IMAGEPASS-P1
 COLOURPASS-GX500
 (Applicable for iR-ADV C5550i/C5560i only)

EFI-Fiery Based Controller Options
 REMOVABLE HDD DRIVE KIT-B1
 FIERY IMPOSE
 FIERY COMPOSE
 FIERY IMPOSE AND COMPOSE

System Accessories
 SERIAL INTERFACE KIT-K3

FAX Accessories
 SUPER G3 FAX BOARD-AS1
 SUPER G3 2ND LINE FAX BOARD-AS1
 SUPER G3 3RD/4TH LINE FAX BOARD-AS1
 REMOTE FAX KIT-A1
 IP FAX EXPANSION KIT-B1

Other Options

Accessibility Accessories
 ADF ACCESS HANDLE-A1
 VOICE GUIDANCE KIT-G1
 VOICE OPERATION KIT-D1

Consumables
 STAMP INK CARTRIDGE-C1
 STAPLE-P1
 STAPLE CARTRIDGE-Y1



To arrange for a demonstration, simply contact our office below.

SOUTH & SOUTHEAST ASIA REGIONAL HEADQUARTERS

Canon Singapore Pte. Ltd.
 1 Fusionopolis Place #15-01
 Galaxis Singapore 138522

Tel : 65-6799 8888
 Fax : 65-6799-8882
 www.canon-asia.com
 www.canon.com.sg

Partner / Dealer Stamp

This document is for information purpose only and the contents are subject to change without notice. Product options, name and availability may vary by regions. Nothing in this document should be construed as a warranty. We expressly disclaim any liability or contractual obligations with respect to this document.

Canon, imageRUNNER, imageRUNNER ADVANCE, imageCHIP, RAPID Fusing System, MEAP, eMaintenance, iW, Business can be simple and get Smart get genuine are trademarks of Canon Inc. and/or its affiliates. "MEAP" is a trademark of CANON Inc., referring to an "application platform" for Canon multifunction and single function printers. Other names may be the trademarks of their respective owners.

uniFLOW, eCopy and Therefore are independent party software distributed by Canon Singapore Pte Ltd.

0211W184 © 2018 Canon Singapore Pte. Ltd.
 All rights reserved. Printed in Singapore.